
WAC LIGHTING

Surface Mounted Channel Responsible Lighting®

项目名称: 灯位号:

产品图片

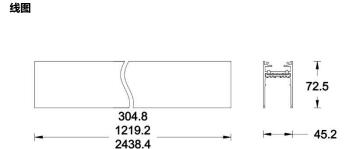

产品描述

STRUT 轨道适配于 WAC STRUT 低压轨道系统灯具,多种安装方式,适配多种天花安装。DC48V 输入,最大总负载电流可达 12.5A。可以任意形状拼接,满足不同的照明应用环境需求,广泛应用于办公,商业等照明空间场所。

产品特性

• 主体材质: 铝合金灯体

• 表面处理: 静电粉末喷涂//阳极氧化

安规认证: /

防护等级: IP20绝缘等级: Class I

产品规格

• 长度: 0.3M/1.2M/2.4M/3.6M

3657.6

• 输入电压: DC48V

• **调光控制**: ON-OFF/0-10V/ELV/DMX512/无线及手机 APP 控

制

• **产品重量**: 约

0.8Kg(0.3M),2.24Kg(1.2M),4.56Kg(2.4M),6.8K

g(3.6M),不含包装

订购模型

Model	Length		Finish
OS2CPS01 OS2CPS04 OS2CPS08 OS2CPS12	01 0.3M Surface Channel04 1.2M Surface Channel08 2.4M Surface Channel12 3.6M Surface Channel	Connected Power Unit Required See page 44 (sold separately)	BK Black WT White

示例: OS2CPS01-BK`

TRIG

Model	Description	Pic
	Trig with Feed	1 -
OS2CPS-FTRIG-BK	Includes 96in feed wire, and 2 channel	
OS2CPS-FTRIG-WT	connectors. Suspension Hardware sold	
	separately. Aircraft cable only.	

WAC LIGHTING

Surface Mounted Channel

Res	pon	sibl	e L	iah	ntin	a [®]

项目名称:		灯位号:
OS2CPS-TRIG-BK OS2CPS-TRIG-WT	Trig Includes 2 channel connectors. Suspension Hardware sold separately. Stem and Aircraft cable compatible.	
OS2CPS-NADP-BK	Adapter	

Additional Trig connectors

明装连接器配件

OS2CPS-NADP-WT

Model	Description	Pic
OS2CS-FE-BK OS2CS-FE-WT	Feed End Includes 24in feed wire	
OS2CS-FEB-BK OS2CS-FEB-WT	Feed End Junction Box 3in junction box with side knockouts	
OS2CSR-I-BK OS2CSR-I-WT	I Connector Joins two channel sections with electrical continuity	
OS2C-ID-BK OS2C-ID-WT	Dead I Connector Joins two sections of channel without electrical continuity	

WAC LIGHTING

Surface Mounted Channel

Resp	oon	sibl	e L	.iat	וi†ר	ng®

项目名称:		灯位号:
OS2CPS-L-BK OS2CPS-L-WT	L Connector Joins two channel sections 90°. Feed separately	
OS2CPS-T-BK OS2CPS-T-WT	T Connector Joins three channel sections. Feed separately	
OS2CPS-X-BK OS2CPS-X-WT	X Connector Joins four channel sections. Feed separately	
OS2CS-IC-BK OS2CS-IC-WT	Inside Corner Joins ceiling to wall channel sections	
OS2CS-OC-BK OS2CS-OC-WT	Outside Corner Joins wall to wall channel sections	
OS2CPST-IC-BKBK OS2CPST-IC-BKWT OS2CPST-IC-WTWT OS2CPST-IC-WTBK	Surface/Suspended to Recessed Corner Joins suspended or surface mounted channel to recessed trim channel	
OS2CPSL-IC-BKBK OS2CPSL-IC-WTBK	Surface/Suspended to Recessed Corner Joins suspended or surface mounted channel to recessed trimless channel	

WAC LIGHTING

Surface Mounted Channel

Responsible Lighting®

项目名称:		灯位号:	
OS2CPS-EC-BK OS2CPS-EC-WT	End Cap Additional end cap		

明装配件

Model	Description	Pic
OS2CP-CP-BK OS2CP-CP-WT	Cable Canopy Covers a standard 4in junction box. Use with cable feed connectors	
OS2C-LOOP-BK	Suspension Loop Mechanical loop Supports up to 15 lb	6
OS2SN-1-BK	VACANCY/PHOTO SENSOR	
OS2C-COV08-BK OS2C-COV08-WT	Channel Cover 2.4M 2.4M length may be field cut, Suitable for top or bottom channel coverage.	